savin®

8055/8065/8075

Digital Imaging Systems

FAST > POWERFUL > PROFESSIONAL > RELIABLE > SECURE >

Increased productivity from start to finish.

Set a new pace in productivity.

Set aside your current idea of productivity and make way for the Savin 8055/8065/8075 Series—the new standard in digital multifunction systems. The 8055/8065/8075 Series is so fast and so functionally rich, it works equally well in high-volume workgroup settings as it does in busy centralized copy and reprographic centers.

Quickly and easily select from print, copy, scan and finishing functions via the improved, user-friendly touch panel.

Everything you need for true productivity.

With ultra-fast print speeds of 55, 65 or 75 ppm and a single-pass document feeder that scans originals at 75 images per minute, you can make quick work of even your biggest print jobs. But productivity isn't just about speed; it's also about capabilities. The 8055/8065/8075 Series covers all the bases by packing everything you need into a single, powerful system. You get a high-volume digital printer, a full-featured copier, a versatile network scanner and professional finishing. And because ease of use also factors into your ability to be more efficient, the 8055/8065/8075 Series is equipped with state-of-the-art connectivity and security features.

Time-saving printing functions.

The Savin 8055/8065/8075 gives you more ways to print and manage files so you can make the most of your time.

- Eliminate wasted time and paper when you use Sample Print to print and check a sample of the job before running the remaining sets.
- Ensure confidentiality with Locked Print, which releases the file only after the correct password has been entered at the system.
- Reduce trips to the printer by using Hold Print to store all your print jobs for printing on demand.
- Save filing space with Stored Print, which retains frequently printed documents and their finishing settings on the system for printing at your convenience.

www.savin.com

Professional in-house creations.

Your documents will look better than ever thanks to outstanding 1200 x 1200 dpi resolution, Refined Print Command Stream (RPCS™) printing capabilities and professional document finishing options. And because you have the right resources to produce high-quality documents, presentations, flyers and booklets in house, your budget will look great, too.

- Waste less paper on discards using Preview features—from Sample Print to Image Preview.
- Create attractive easy-to-read booklets with Creep for Booklet, which shifts images on the middle pages to ensure proper alignment.
- Ensure documents are trimmed precisely using the Crop Marks function.
- Save money by creating professionally finished documents in house. Add preprinted covers with the Cover Interposer.

The single-pass automatic document feeder reduces wear & tear on originals and enhances productivity.

- Produce saddle-stitched booklets with the SR4000 Booklet Finisher.
- Staple up to 100 sheets with the SR842 Finisher.
- Use the Hole Punch Unit to create 2- or 3-hole-punched documents for easy insertion into binders.
- Create even more professional-looking documents with tabs, chapters, page numbers and Z-folds.

Safe and sound security.

The Savin 8055/8065/8075 Series includes a variety of security options to safeguard your vital information.

- Safeguard your confidential information with Unauthorized Copy Control, which protects sensitive documents with an embedded message that appears if a document is copied.
- Send PDFs securely with PDF Encryption. Assign a password to your PDFs so that only the intended recipient can open the file.
- Make any effort to access and reconstruct residual data virtually impossible using the DataOverwriteSecuritySystem (DOSS) option, which overwrites copy, print and scan data with random sequences of 1's and 0's.
- Be assured that system users are authorized. Windows® Authentication requires Savin 8055/8065/8075 Series users to login using their Windows® PC password. This feature also ensures that the e-mails you receive have been sent by an authorized sender.
- Restrict access to various files and functions by assigning up to 500 user codes.

Scan-to-URL.

Minimize network traffic and prevent overloaded e-mail in-boxes by scanning large documents onto the hard disk of the Savin 8055/8065/8075 Series and e-mailing a convenient URL link to users within the LAN/WAN.

8055/8065/8075 Digital Imaging Systems

FAST > POWERFUL > PROFESSIONAL > RELIABLE > SECURE >

Print on 8.5" x 11" or 8.5" x 14" stock even if you start with different sized originals. Add the finishing touch with a color cover.

Enhanced digital distribution.

Imagine taking a thick presentation, scanning it quickly at 75 pages per minute, instantly digitizing the file, and then simultaneously sending it to up to 500 addresses across the country or around the globe. That's the power of the Savin 8055/8065/8075 Series' digital distribution capabilities.

Savin's Document Server technology and DeskTopBinder™ management applications provide even more timesaving storage and distribution functions.

- Print or distribute stored digital files and scanned hardcopies at your convenience.
- View multiple stored documents, combine them into new files, and select finishing options via any standard Web browser with Web Image Monitor™.
- Find recipient e-mail addresses more quickly with the improved Lightweight Directory Access Protocol (LDAP) search.
- Confirm the content of your documents before printing with File Preview, eliminating errors and waste.

Manage your entire fleet of MFPs.

The optional @Remote Intelligent Remote Management System automatically reports meter data, freeing you to focus on getting your work out, instead of worrying about collecting and reporting the machine's usage.

Manage and access your documents remotely.

Imagine being able to securely store, edit, share and retrieve documents and files from your PC via the Internet or securely scan hardcopy documents directly from your Savin system MFPs. Not only is this all possible with Savin DocumentMall, it's available 24/7. Now workers in remote locations can collaborate in real time and in a secure environment.

Your Environmental Partner

The Savin 8055/8065/8075 Series is ENERGY STAR® qualified, continuing our long-standing, environmentally friendly commitment to developing office solutions with superior energy-and supply-saving features, including:

- 30-second, Quick Start-up (QSU) Technology
- Power-saving Sleep Modes
- Duplex and Combine Copy Mode
- Toner Recycling
- Low Noise Levels
- Minimal Ozone Emissions
- RoHS (Restriction of Hazardous Substances) Compliant

CHANGE FOR THE BETTER WITH ENERGY STAR

Our earth, Our tomorrow

Automatic Document Feeder – Standard
Scan at up to 75 images per minute through the single-pass document feeder.

Cover Interposer – Optional
The Interposer makes it easy to add covers and inserts—including full color— into your jobs.

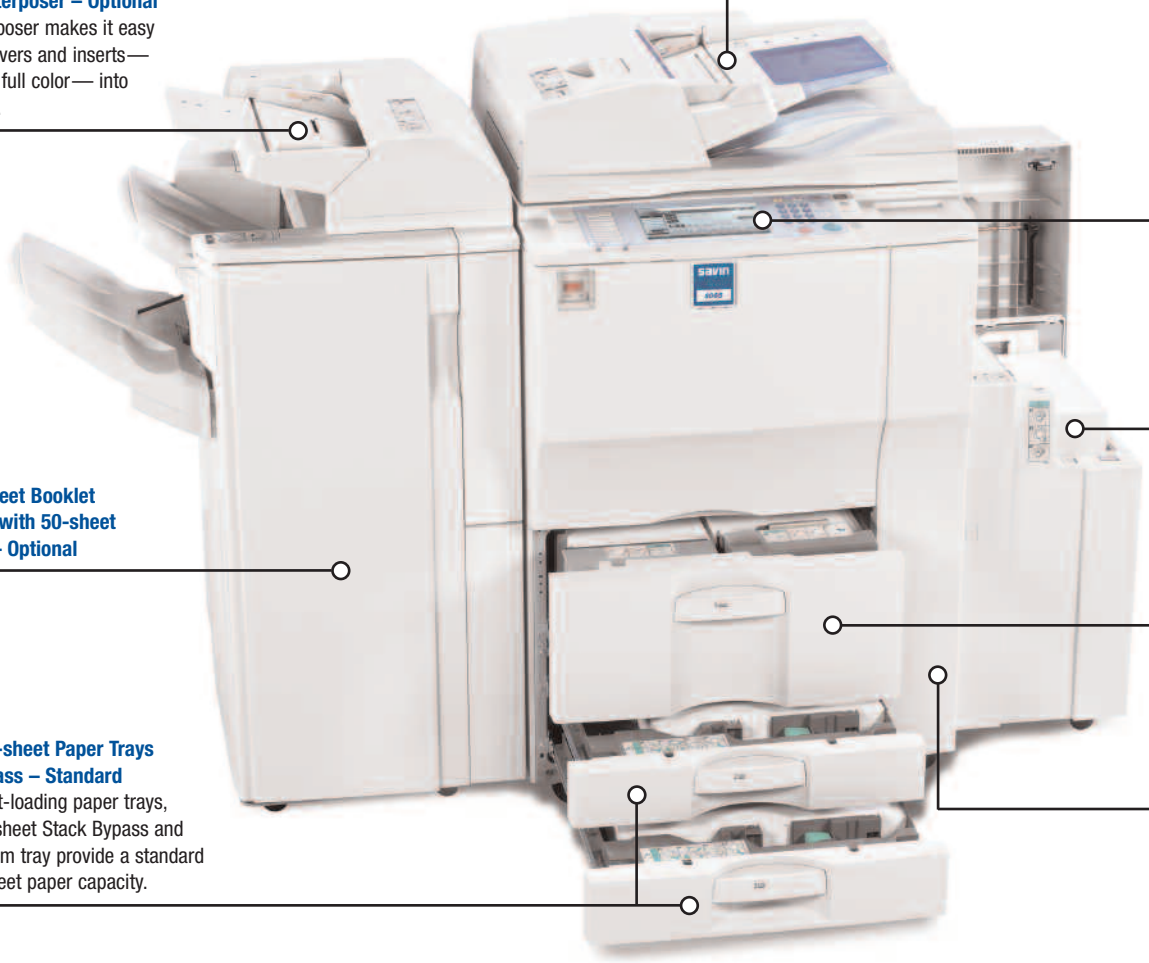

Intuitive Control Panel
The user-friendly LCD panel offers a large display with easy job programming for copy, print, scan and store, and finishing functions.

Large Capacity Tray – Optional
The optional LCT holds 4,000 sheets, providing a maximum paper capacity of 8,300 sheets.

2,000-sheet Booklet Finisher with 50-sheet Stapler – Optional

Tandem Paper Tray – Standard
The tandem paper tray holds 1,550 sheets in each of the two compartments, for a total of 3,100 sheets.

Two 550-sheet Paper Trays and Bypass – Standard
Dual front-loading paper trays, the 100-sheet Stack Bypass and the tandem tray provide a standard 4,300-sheet paper capacity.

Base System
55 pages per minute
65 pages per minute
75 pages per minute

The Savin 8055 prints at 55 pages per minute.

The Savin 8065, shown with the 50-sheet Staple Finisher, prints at 65 pages per minute.

The Savin 8075, shown with the Cover Interposer, 100-sheet Staple Finisher, and Large Capacity Tray, prints at 75 pages per minute.

8055/8065/8075 SPECIFICATIONS

FAST > POWERFUL > PROFESSIONAL > RELIABLE > SECURE >

SPECIFICATIONS

Printing Process	Four laser beams and electro-photographic printing
Configuration	Console
Memory (RAM)	Basic Models: 256MB std/512MB max S/P Models: 512MB std/max
HDD	80GB
First Copy Time	8055: 4.2 seconds 8065/8075: 3.5 seconds
Warm Up Time	30 seconds from power off
Copy Speed	55/65/75 copies/minute multiple sets (Letter LEF)
Original Type	Book/Sheet/Object
Original Size	Up to 11" x 17" (12" x 18" using platen)
Copy Size	5.5" x 8.5" - 11" x 17" (12" x 18" via bypass)
Copy Resolution	True 1200 x 1200 dpi
Grayscale	256 levels
Reproduction Ratios	25%, 50%, 65%, 73%, 78%, 85%, 93%, 121%, 129%, 155%, 200%, 400%
Zoom	25% - 400% in 1% increments
Paper Feed	Standard: Tray 1: 1,550 sheets x 2 (tandem) = 3,100 (Letter); Trays 2 & 3: 550 sheets each (user adjustable) Bypass: 100 sheets Total Standard/Max: 4,300/8,300 sheets
Paper Weight	Trays 1-3: 14 lb. - 34 lb. Bond; Bypass (Thick Paper Mode): 14 lb. Bond - 110 lb. Index (216 g/m²)
Quantity Indicator	1 - 999
Power Source	120V/60Hz/20A (Requires dedicated 20A outlet)
Dimensions (WxDxH)	27.2" x 31.1" x 45.9"
Weight	454 lbs.

SYSTEM ACCESSORIES

Automatic Document Feeder (Standard)

Original Size	5.5" x 8.5" - 11" x 17"
Paper Weight	Simplex: 11 lb. - 34 lb. Bond/ Duplex: 14 lb. - 34 lb. Bond
Capacity	100 sheets

OPTIONS

RT43 Large-Capacity Tray (LCT)

Paper Size	8.5" x 11" LEF
Paper Weight	14 - 34 lb. Bond
Paper Capacity	4,000 sheets (20 lb. Bond)
Dimensions (WxDxH)	12.4" x 18.0" x 25.9"

8.5" x 14" Paper Size Tray Type 1075

Enables legal-size (8.5" x 14") paper to be fed through LCT.

Paper Size	8.5" x 14", 8.5" x 11" SEF
Paper Capacity	2,500 sheets (20 lb. Bond)

CS391 9-bin Mailbox

Compatible with SR970 and SR4000 Finishers.

Number of Bins	9
Stack Capacity	100 sheets/bin (20 lb. Bond)
Paper Size	5.5" x 8.5" - 11" x 17"

Copy Tray Type 2075

Receives output when device is not configured with a finisher.

Paper Capacity	500 sheets (8.5" x 11"), 250 sheets (8.5" x 14", 11" x 17")

11" x 17" Tray Type 1075

Enables 11" x 17" and 8.5" x 14" paper to be fed from Tray 1.
Without this option, Tray 1 only accepts 8.5" x 11".

Paper Size	11" x 17" SEF, 8.5" x 14" SEF, 8.5" x 11"
Paper Capacity	1,000 sheets

Tab Sheet Holder Type 3260

Enables tab stock to be fed from Tray 2 or Tray 3.

Capacity	100 sheets

Cover Interposer Tray Type 3260

Compatible with all three finishers.

Paper Size	5.5" x 8.5" - 11" x 17"
Paper Weight	17 lb. Bond - 110 lb. Index (216 g/m²)
Paper Capacity	200 sheets (20 lb. Bond)

OPTIONS (cont.)

Z-Folding Unit Type ZF4000

Compatible only with SR842 and SR4000 Finishers.

Z-Folding Positions	Right, left, bottom
Paper Size	8.5" x 11" SEF, 8.5" x 14" SEF, 11" x 17" SEF
Paper Weight	17 lb. - 20 lb. Bond

SR4000 2,000-sheet Finisher with Saddle Stitch

Proof Tray

Paper Size	5.5" x 8.5" - 11" x 17" SEF, 12" x 18" SEF
Paper Weight	14 lb. Bond - 90 lb. Index (163 g/m²)
Stack Capacity	250 sheets (8.5" x 11" or smaller), 50 sheets (8.5" x 14" or larger) 30 sheets (Z-fold/8.5" x 14" or larger) 20 sheets (Z-fold/8.5" x 11" or smaller)

Shift Tray

Paper Size	5.5" x 8.5" - 11" x 17" SEF, 12" x 18" SEF
Paper Weight	14 lb. Bond - 110 lb. Index (216 g/m²)
Stack Capacity	2,000 sheets (8.5" x 11" LEF) 1,000 sheets (8.5" x 11" SEF, 8.5" x 14" SEF, 11" x 17" SEF, 12" x 18" SEF) 100 sheets (5.5" x 8.5" SEF) 30 sheets (Z-fold/8.5" x 14" or larger) 20 sheets (Z-fold/8.5" x 11" or smaller)

Staple Capacity

Same Paper Size	50 sheets (8.5" x 11" or smaller) 30 sheets (8.5" x 14" or larger)
Mixed Paper Size	30 sheets (8.5" x 11", 11" x 17")
Z-Fold Paper Only	5 sheets
Saddle Stitch	15 sheets (8.5" x 11" SEF, 8.5" x 14" SEF, 11" x 17" SEF)
Staple Position	Top, bottom, 2 staples, top slant
Center Folding w/o Saddle Stitch	1 sheet
Dimensions (WxDxH)	25.9" x 24.1" x 37.8"

Punch Unit Type 3260

Hole Positions	2 or 3 holes
Paper Size	5.5" x 8.5" - 11" x 17"
Paper Weight	14 lb. Bond - 90 lb. Index (163 g/m²)

Output Jogger Unit Type 3260

Secures each finished set in an orderly fashion.

SR842 3,000-sheet Finisher w/100-sheet Stapler

Proof Tray

Paper Size	5.5" x 8.5" - 11" x 17" SEF, 12" x 18" SEF
Paper Weight	14 lb. Bond - 110 lb. Index (216 g/m²)
Stack Capacity	500 sheets (8.5" x 11" or smaller), 250 sheets (8.5" x 14" or larger) 30 sheets (Z-fold)

Shift Tray

Paper Size	5.5" x 8.5" - 11" x 17" SEF, 12" x 18" SEF
Paper Weight	14 lb. Bond - 110 lb. Index (216 g/m²)
Stack Capacity	3,000 sheets (8.5" x 11" LEF) 1,500 sheets (8.5" x 11" SEF, 8.5" x 14" SEF, 11" x 17" SEF) 500 sheets (5.5" x 8.5" LEF) 100 sheets (5.5" x 8.5" SEF) 30 sheets (Z-fold)

Staple Capacity

Same Paper Size	100 sheets (8.5" x 11") 50 sheets (8.5" x 14", 11" x 17")
Mixed Paper Size	50 sheets (8.5" x 11" LEF, 11" x 17" SEF)
Z-Fold Paper Only	10 sheets
Staple Positions	Top, top slant, bottom, 2 staples
Dimensions (WxDxH)	31.5" x 28.7" x 38.6"

Punch Unit Type 1075

Hole Positions	2 or 3 holes
Paper Size	5.5" x 8.5" - 11" x 17"
Paper Weight	14 lb. - 34 lb. Bond

GBC StreamPunch III

Paper Size	8.5" x 11" LEF
Paper Weight	20 lb. Bond - 110 lb. Index (216 g/m²)
Die Sets	CombBind®, Twin Loop Wire (2:1 or 3:1), ColorCoil®, VeloBind®, Three-Ring, ProClick®

BK5010 Production Booklet Maker

Paper Size	8.5" x 11" - 11" x 17"
Paper Weight	16 lb. Bond - 110 lb. Index (216 g/m²)

Output Jogger Unit Type 1075

Secures each finished set in an orderly fashion.

OPTIONS (cont.)

SR970 3,000-sheet Finisher w/50-Sheet Stapler

Proof Tray

Paper Size	5.5" x 8.5" - 11" x 17" SEF, 12" x 18" SEF
Paper Weight	14 lb. Bond - 90 lb. Index (163 g/m²)
Stack Capacity	250 sheets (8.5" x 11" or smaller), 50 sheets (8.5" x 14" or larger)

Shift Tray

Paper Size	5.5" x 8.5" - 11" x 17" SEF, 12" x 18" SEF
Paper Weight	14 lb. Bond - 110 lb. Index (216 g/m²)
Stack Capacity	3,000 sheets (8.5" x 11" LEF); 1,500 sheets (8.5" x 11" SEF, 8.5" x 14" SEF, 11" x 17" SEF, 12" x 18" SEF) 100 sheets (5.5" x 8.5" SEF)

Staple Capacity

Same Paper Size	50 sheets (8.5" x 11" or smaller) 30 sheets (8.5" x 14" or larger)
Mixed Paper Size	30 sheets (8.5" x 11" LEF, 11" x 17" SEF)
Staple Positions	Top, bottom, 2 staples, top slant
Dimensions (WxDxH)	25.9" x 24.1" x 37.8"

Punch Unit Type 3260

Hole Positions	2 or 3 holes
Paper Size	5.5" x 8.5" - 11" x 17"
Paper Weight	14 lb. Bond - 90 lb. Index (163 g/m²)

Output Jogger Unit Type 3260

Secures each finished set in an orderly fashion.

PRINT CONTROLLER SPECIFICATIONS

Print Speed	8055: 55 prints/minute 8065: 65 prints/minute 8075: 75 prints/minute
CPU	Intel Celeron LV 866 MHz
Host Interface	Standard: 10Base-T Ethernet/100Base-TX Ethernet, USB 2.0 Optional: IEEE 1284 (Parallel), IEEE 802.11b (Wireless LAN), IEEE 1394, Bluetooth, 1000Base-T Ethernet
Network Protocol	TCP/IP, IPX/SPX, SMB, AppleTalk
Memory Capacity	512MB DDR-SDRAM
PDL	Standard: RPCS, PCL5e, PCL6 Optional: Adobe PostScript 3
Print Resolution	PCL5e: 300/600 dpi PCL6: 600/1200 dpi PS 3: 600/1200 dpi RPCS: 300/600/1200 dpi
Drivers	PCL5e/PCL6: Windows 9x/ME/NT 4.0/2000/XP/Server 2003 RPCS: Windows 9x/ME/NT 4.0/2000/XP/Server 2003 PS 3: Windows 9x/ME/NT 4.0/2000/XP/Server 2003, Macintosh OS 8.6 and later, Mac OS X Classic, Mac OS X Native v.10.1 and later

SCANNER SPECIFICATIONS

Scan Speed	75 sides/minute (200 dpi)
Optical Resolution	100 dpi - 600 dpi (100 -1200 dpi with TWAIN)
Output Format	TIFF (Multi/Single), JPEG, PDF (Multi/Single)
Interface Support	Standard: 10Base-T Ethernet/100Base-TX Ethernet; Optional: IEEE 802.11b, IEEE 1394, 1000Base-T Ethernet
Bundled Drivers	Network TWAIN
Scan-to-Email	Yes (up to 500 addresses per send)
LDAP Support	Yes (Version 3)
Max Stored Destinations	2,000
Authentication	SMTP/POP before SMTP
Scan-to-Folder	Yes (up to 50 folders per job)
Protocol Support	SMB, FTP, NCP

For maximum performance and yield, we recommend using genuine Savin parts and supplies.

www.savin.com

Adobe PostScript 3 Bluetooth Designed for Microsoft Windows XP Adobe PDF Java Powered Embedded Software Architecture CITRIX

Savin Five Dedrick Place, West Caldwell, NJ 07006

SAVIN® is a registered trademark of Ricoh Corporation. Windows® and Windows® 95/98/ Me/NT4.0/2000/XP are registered trademarks of Microsoft Corporation. Macintosh®, Mac® OS and AppleTalk® are registered trademarks of Apple Computer, Inc. Adobe® and PostScript® are registered trademarks of Adobe Systems, Inc. RPCS™ is a trademark of Ricoh Company, Ltd. All other trademarks are the property of their respective owners. Print speed may be affected by network, application or PC performance. Specifications and external appearances are subject to change without notice. Products are shown with optional features.
Printed in U.S.A. on recycled paper. S2190